

## 168 Series

### Outdoor Sealed Wire Terminal Enclosure

For Indoor or Outdoor Locations  
Designed for Digital Voice Applications

Termination Block Equipped with Integral Sealed Test Points

Termination Block Utilizes Tii's Gel-Sealed IDC Tool-Less Rocker Design

Available in Multiple Configurations



#### Tii Technologies Inc.

##### Corporate Headquarters:

141 Rodeo Drive  
Edgewood, NY 11717  
Phone: 631.789.5000 • Fax: 631.789.5063  
Toll Free: 888.844.4720  
sales@tiitech.com

##### Locations:

South March  
Long March Industrial Estate  
Daventry, Northamptonshire, NN11 4PH, UK  
Phone: +44 (0) 1327 301853  
Fax: +44 (0) 1327 879532  
sales@tiitech.co.uk

Av. José de Escandón y Helguera  
No. 21 Ciudad Industrial  
Matamoros, Tamaulipas, C.P. 87494, México  
Phone: 868.812.8011 • Fax: 868.812.8025  
salesmx@tiitech.com.mx

www.tiitech.com



168-05

The 168 Series Outdoor Sealed Wire Terminal Enclosure accommodates the 68M Series Sealed Wire Terminal. The 168 Series enclosure is designed for applications requiring more than one parallel connection to a single or two pair service. This product is an ideal fit for digital voice networks.



#### KEY PRODUCT BENEFITS

- ▶ The enclosure is molded of temperature and humidity-resistant thermoplastic, which resists cracking, crazing, and discoloration.
- ▶ The cover interlocks with the base to protect the contents from any foreign matter.
- ▶ The 168 enclosure features scalloped sides designed to provide easy internal access.
- ▶ Each enclosure has two wire entrance grommets and a snap-fit hinged cover with provisions for a tie wrap along with mounting holes for wall or pole mounting.
- ▶ Compact, low profile design fits into applications where space is limited.
- ▶ Optional termination block configurations provide interface for home security systems.

#### INDUSTRY STANDARDS

- ▶ Listed to cUL and UL 1863

# 168 Series

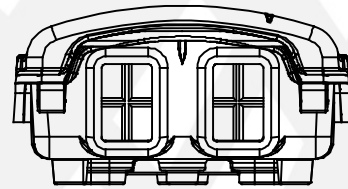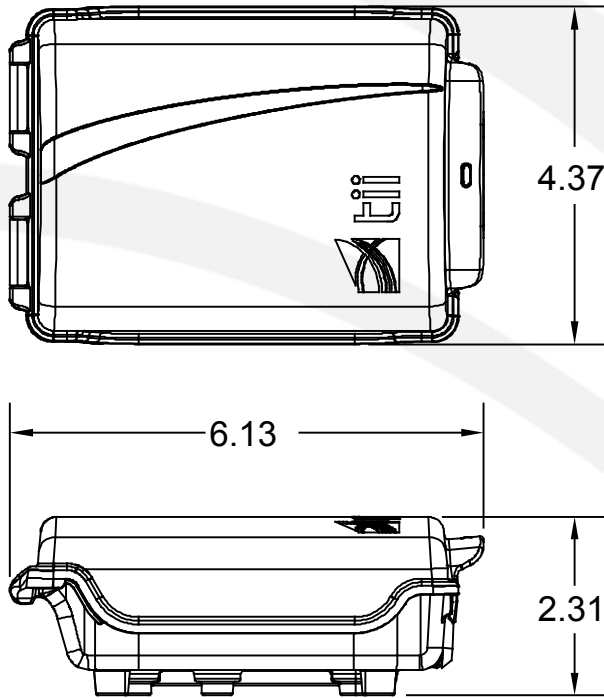

*Dimensions are in Inches*

## ORDERING INFORMATION Model Number Matrix

168	- XX	- XX
	Position 1 Upper	Position 2 Lower
	00 = no block	00 = no block
	01 = 67M-1	01 = 67M-1
	02 = 68M-1*	06 = 69M-1
	03 = 68M-2*	07 = 69M-2
	04 = 68M-2S*	08 = 69M-2S
	05 = 68M-2S-4*	09 = SVMWT
	06 = 69M-1	
	07 = 69M-2	
	08 = 69M-2S	

*\* These components fit into Position 1 only and must be configured as stand alone components.*