




For protection of Electronic Telephone Systems, PBX's, KSU's and Key Systems .

FEATURES & BENEFITS

- UL 497 Listed for primary protection
- Utilizes industry standard 5-pin protector modules
- 110 IDC termination input and output
- High-impact, fire retardant housing
- Units can be cascaded to provide for expansion
- Compact, lightweight design
- AQL Incoming Inspection Process
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)

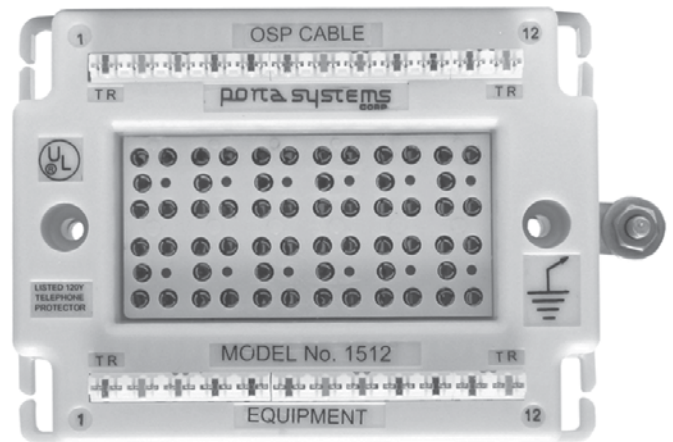

ORDERING INFORMATION

| Model# | Pair Count | Input | Output | Modules | Module Model# |
|-----------|------------|-------|--------|------------------|---------------|
| 1512 | 12 | 110 | 110 | None | NA |
| 1512GT | 12 | 110 | 110 | 230V Gas Tube | 175BCXN-230 |
| 1512SS240 | 12 | 110 | 110 | 240V Solid State | 115SCN-240 |



BUILDING ENTRANCE PROTECTOR



110 Termination



MECHANICAL SPECIFICATIONS FOR 1512 BUILDING ENTRANCE TERMINAL:

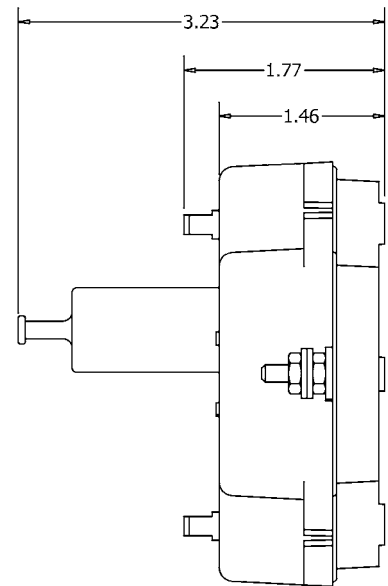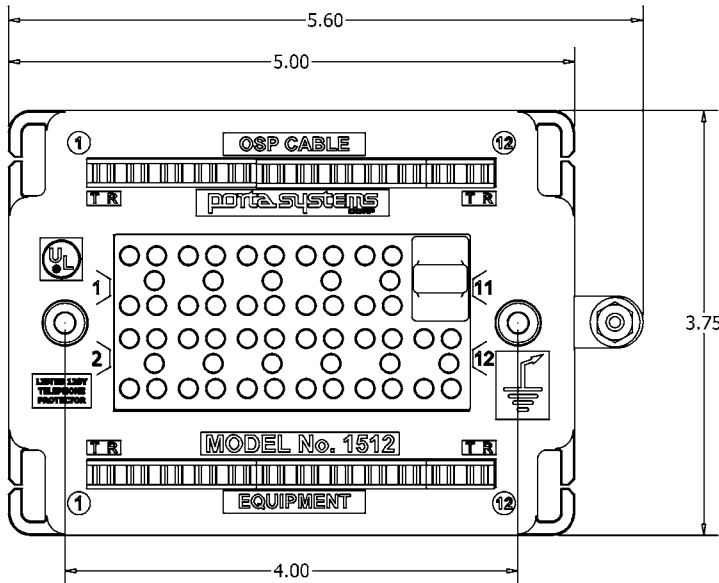

| Pair Count | Dimensions (height x width x depth) | Weight (approx.)* |
|------------|---|-------------------|
| 12 PAIR | 3.75" x 5.6" x 3.3" (9.5 cm x 14.2 cm x 8.2 cm) | 1 lbs. |

* Weight - Add approx 0.5 oz per installed module.