

At the point of demarcation, Building Entrance Terminals, or BET's, safeguard communication equipment from damaging electrical surges that may get onto those incoming lines.

### FEATURES & BENEFITS

- UL 497 Listed for primary and secondary protection
- Available with a variety of termination choices, and in 25, 50 and 100-pair configurations
- 110 output
- Manufactured from 16 gauge, epoxy powder coated steel
- Cover included
- Uses industry standard 5-pin protector modules
- AQL Incoming Inspection Process
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)



(Cover Not Shown)

### ORDERING INFORMATION


Model#	Pair Count	Input	Output	Modules	Module Model#	Cover
25100-ST-M110C	100	ST	110	None	NA	Yes
25100-ST-M110PC	100	ST	110	230V Gas Tube	175BCXN-230	Yes

BUILDING ENTRANCE TERMINALS

Stub Termination



MECHANICAL SPECIFICATIONS FOR 25100-ST-M110 BUILDING ENTRANCE TERMINAL:

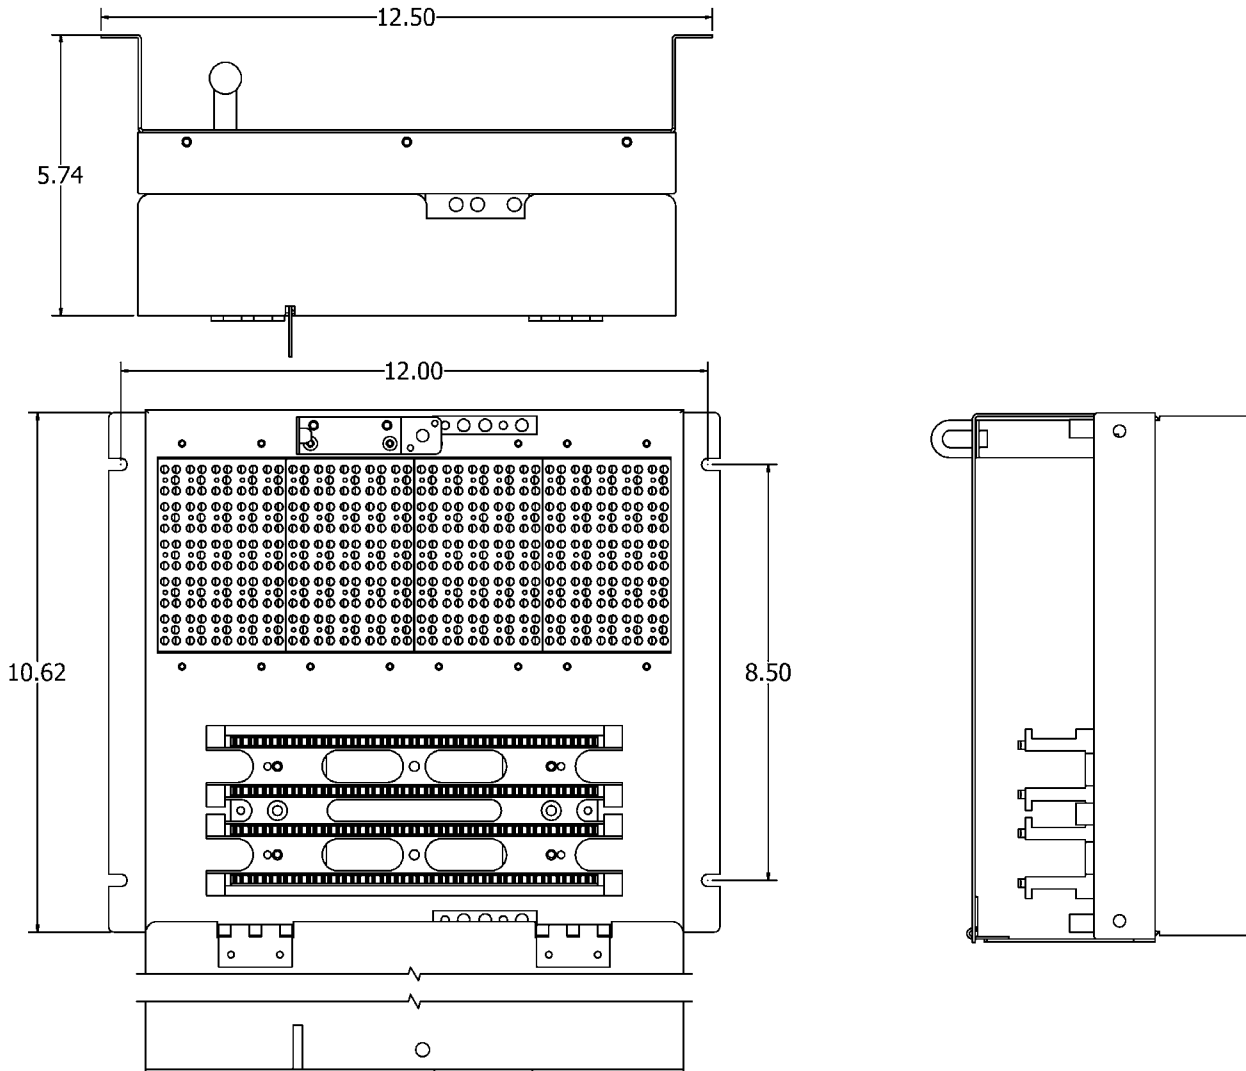

Pair Count	Dimensions (height x width x depth)	Weight (approx.)*
100 PAIR	10.75" x 12.5" x 6.56" (27.3 cm x 31.8 cm x 16.2 cm)	12 lbs.

\* Weight - Add approx 0.5 oz per installed module.