

512, 1512


12 Pair, 5-Pin Building Entrance Protector Packs

For Protection of Electronic
Telephone Systems, PBXs,
KSUs and Key Systems


Uses Standard 5-Pin Protectors

66 or 110 Termination
Input/Output

UL Listed for Primary and
Secondary Protection

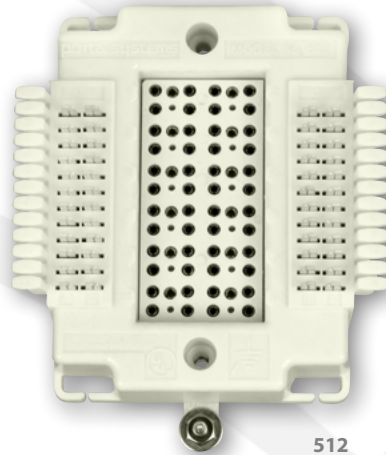

512

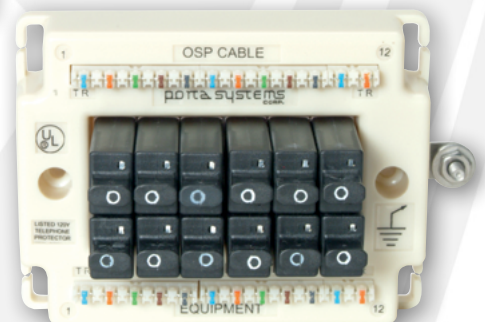

1512GT

UL Listed Primary and Secondary five-pin protector packs are suitable for use at the demarcation point for Customer Premise owners and installers for runs between buildings in an industrial, commercial, or campus environment to protect communication networks.

KEY PRODUCT BENEFITS

- ▶ Utilizes industry standard 5-pin protector modules
- ▶ 512 features 66 IDC termination input/output
- ▶ 1512 features 110 IDC termination input/output
- ▶ High-impact, fire retardant housing
- ▶ Units can be cascaded to provide for expansion
- ▶ Compact, lightweight design

INDUSTRY STANDARDS

- ▶ UL 497 Listed for primary protection
- ▶ UL 497A & 497B Listed for secondary protection



Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717

Phone: 631.789.5000


Fax: 631.789.5063

Toll Free: 888.844.4720

sales@tiitech.com

www.tiitech.com

512 / 1512

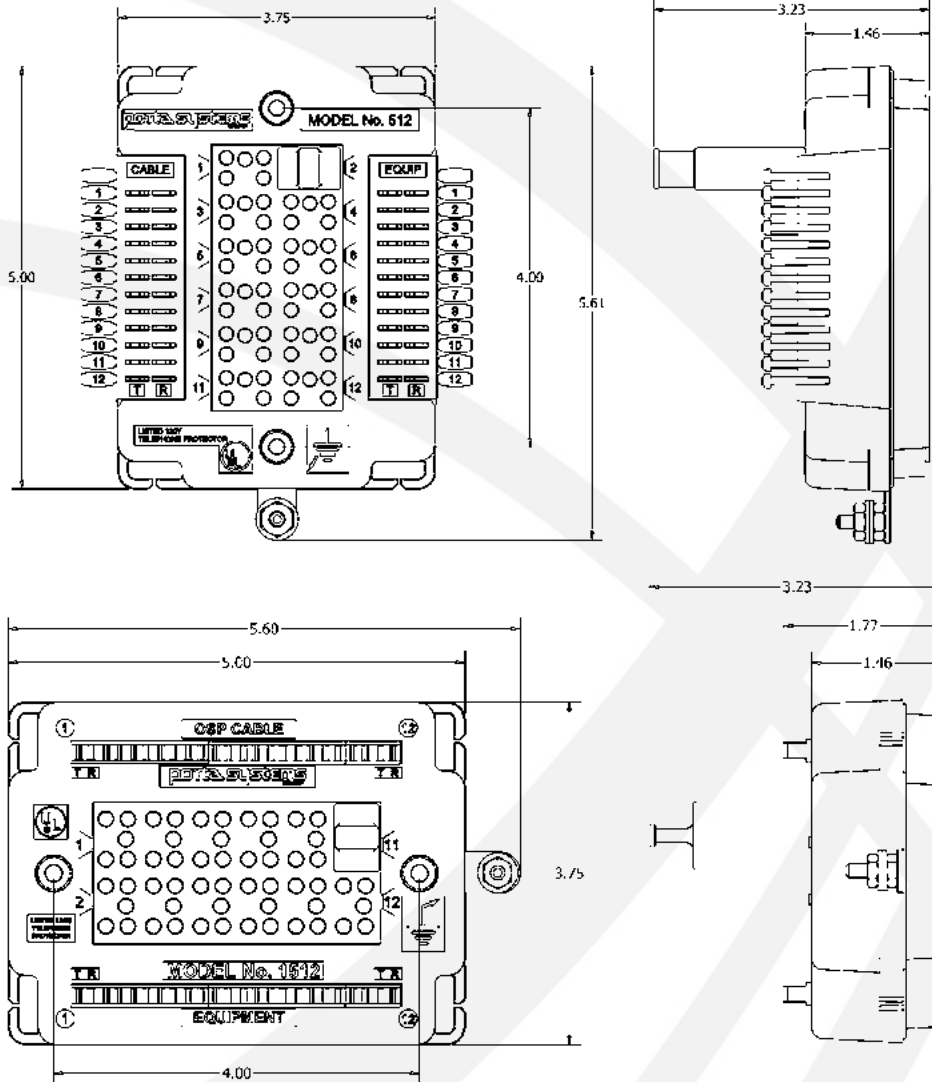

Dimensions are in Inches

	Dimensions (height x width x depth)	Weight (approx.)
512	5.6" x 3.75" x 3.3" (14.2 cm x 9.5 cm x 8.2 cm)	2 lbs.
1512	3.75" x 5.6" x 3.3" (9.5 cm x 14.2 cm x 8.2 cm)	

ORDERING INFORMATION

Model #	Pair Count	Input	Output	Modules	Module Model#
512	12	66	66	None	N/A
512GT	12	66	66	230V Gas Tube	175-3C1EW-NL
512SS240	12	66	66	240V Solid State	115-6C1FSC-N
1512	12	110	110	None	N/A
1512GT	12	110	110	350V Gas Tube	175-3C1EW-NL
1512SS240	12	110	110	240V Solid State	115-6C1FSC-N