


For protection of Electronic Telephone Systems, PBX's, KSU's and Key Systems .

FEATURES & BENEFITS

- UL 497 Listed for primary protection
- Utilizes industry standard 5-pin protector modules
- 66 IDC termination input and output
- High-impact, fire retardant housing
- Units can be cascaded to provide for expansion
- Can be mounted to 89 style stand-off brackets
- Compact, lightweight design
- AQL Incoming Inspection Process
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F
(-25°C to 65°C)

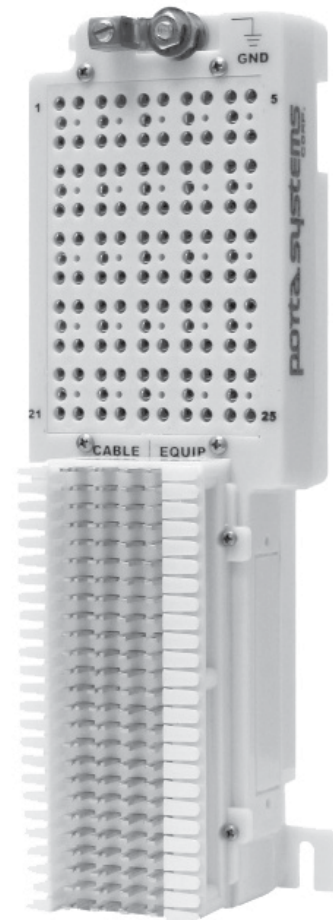

ORDERING INFORMATION

Model#	Pair Count	Input	Output	Modules	Module Model#
525	25	66	66	None	NA
525GT	25	66	66	230V Gas Tube	175BCXN-230
525SS240	25	66	66	240V Solid State	115SCN-240


BUILDING ENTRANCE PROTECTOR



66 Termination



MECHANICAL SPECIFICATIONS FOR 525 BUILDING ENTRANCE TERMINAL:

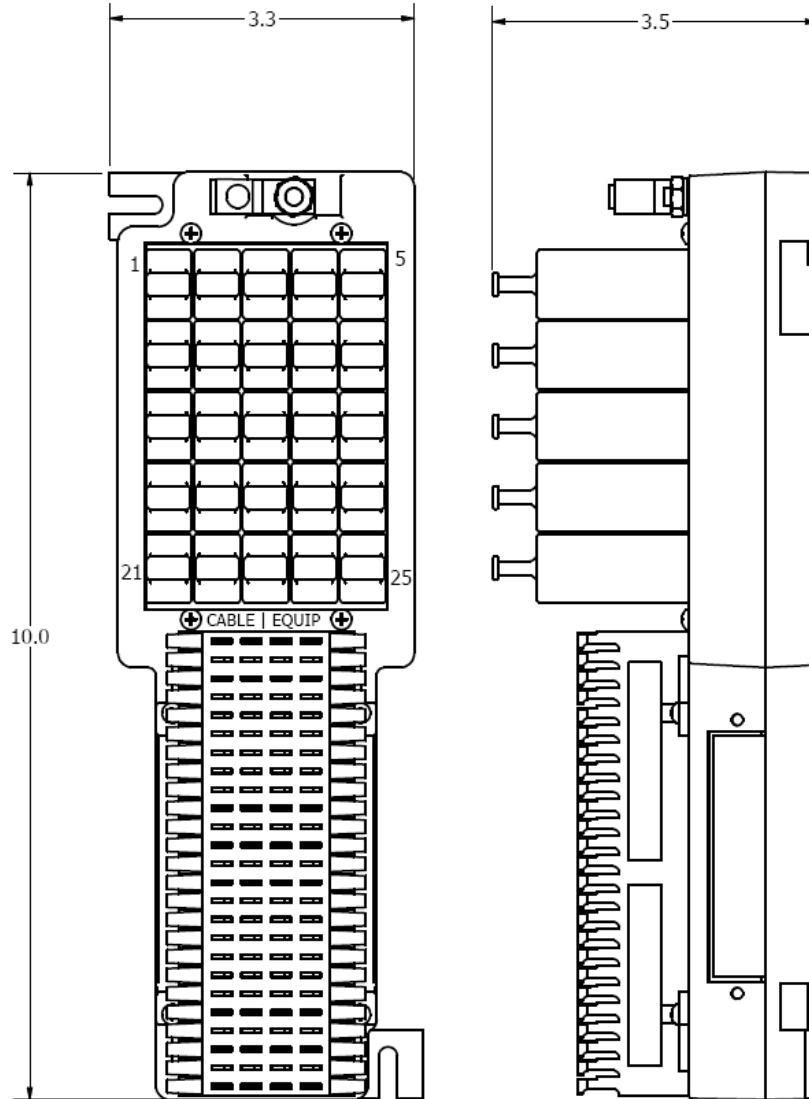

Pair Count	Dimensions (height x width x depth)	Weight (approx.)*
25 PAIR	10" x 3.4" x 3.5" (25.4 cm x 11.7 cm x 8.2 cm)	2 lbs.

* Weight - Add approx 0.5 oz per installed module.