




The 581 and 1581 blocks are ideal protectors for voice installations, PBX's, key systems, or any communication system connected to outside plant cable. Porta Systems Protectors provide the same high quality connection and protection capabilities as larger steel building entrance terminals, in a compact lightweight design.

**FEATURES & BENEFITS**

- UL 497 and UL 497A listed for primary and secondary protection
- Available loaded with Gas Tube protector modules
- Compact, lightweight design
- High-impact, fire retardant housing
- Can be mounted to 89 style stand-off brackets
- Provide both 66 and RJ21 inputs and outputs
- Compatible with all Porta Systems 1-Pin Modules
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)

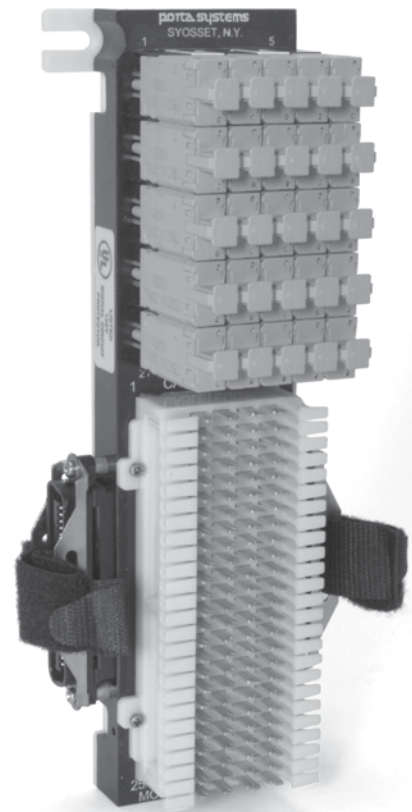

581P4

**ORDERING INFORMATION**

Model#	Pair Count	Terminations
581P4	25	RJ21 Male (In) RJ21 Female (Out) In Parallel with 66 in/out
581P425GT	25	Loaded w/ 75BCXN-230 Gas Tube Modules

581P4

CUSTOMER PREMISE PROTECTION PRODUCTS



PROTECTOR BLOCKS

Single-Pin



MECHANICAL SPECIFICATIONS FOR 581P4 PROTECTOR BLOCKS:

MODEL 581P4 RJXI/RJXO

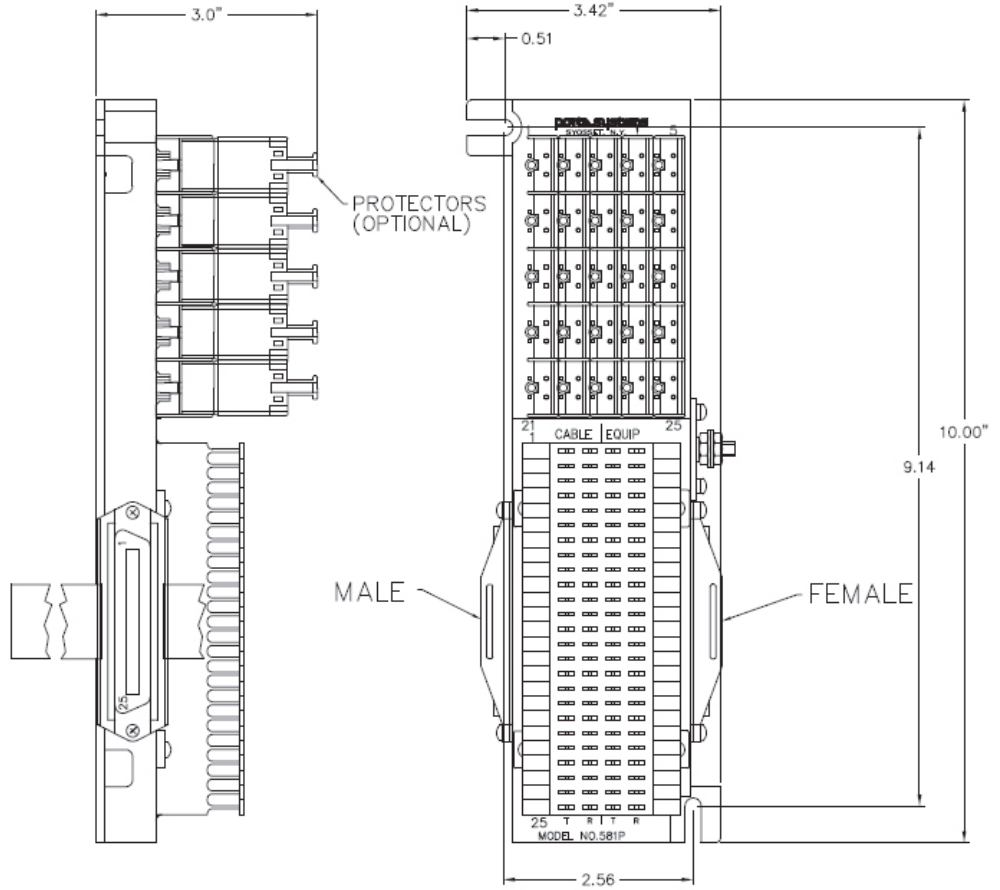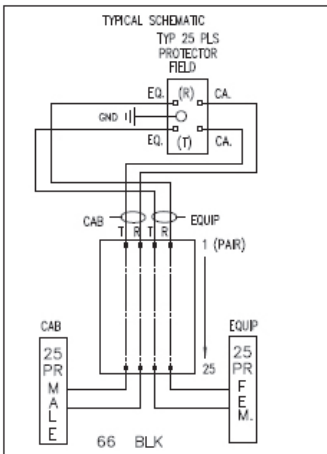

Pair Count	Dimensions (height x width x depth)	Weight (approx.)*
25	10" x 2.36" x 3" (25.4 cm x 6 cm x 7 cm)	2 lbs

\* Weight - Add approx 0.5 oz per installed module.



For more information contact:  
 141 Rodeo Dr.  
 Edgewood, NY 11717  
 T. 631.789.5000  
 Toll Free 888.844.4720  
 F. 631.789.5063  
 sales@tiinettech.com  
 www.tiinettech.com