

67 Series


Sealed Wire Terminal

Utilizes Gel-Sealed
IDC Rocker Design

Tool-Less Terminations

Mounts Easily to a
Suitable Flat Surface or
Installs in a UL Listed
Wire Terminal Housing

CAT-6 Compliant

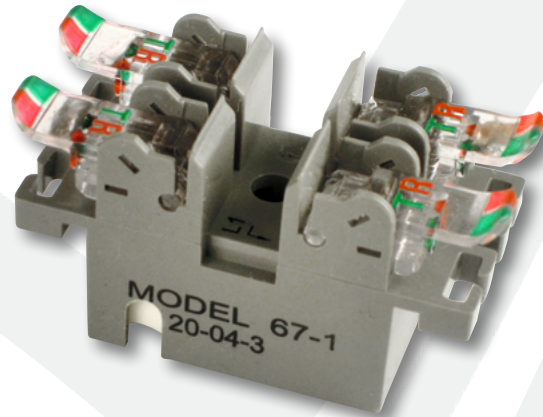

67-1

67 Sealed Wire Terminals are designed for applications requiring more than one parallel connection to a single tip-ring pair. The 67 offers one or more outputs to each single pair input.

KEY PRODUCT BENEFITS

- ▶ Terminations are made to gel sealed insulation displacement contacts (IDC) by means of convenient tool-less rocker assemblies. Wire stripping is not required.
- ▶ Compact, low profile design fits into applications where space is limited
- ▶ The 67 may be mounted via screws to a suitable flat surface or installed within a Tii indoor/outdoor wire terminal housing
- ▶ Accepts 26 through 22 gauge solid conductor wire sizes

INDUSTRY STANDARDS

- ▶ Listed to UL 1863




Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

67 Series

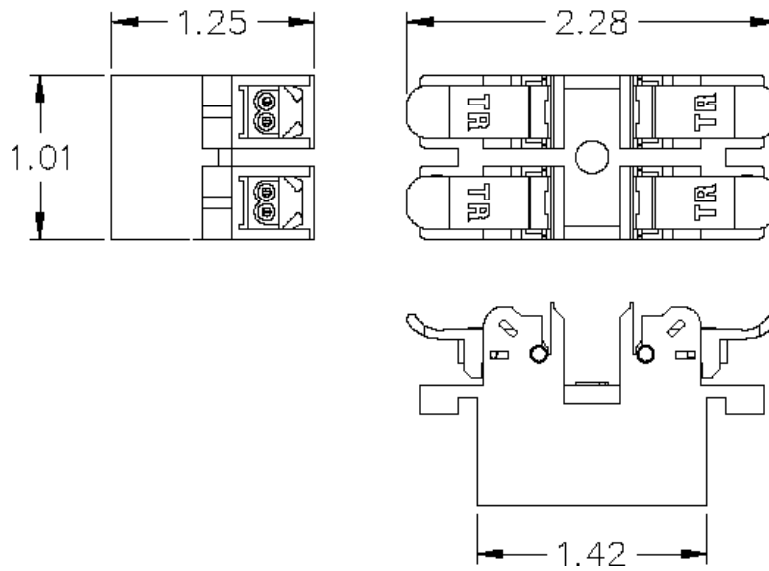

Dimensions are in Inches

ORDERING INFORMATION

| Model No. | Description |
|------------------|--|
| 67-1 | 1 Pair Input, 3 Parallel Pair Outputs, Sealed Wire Terminal |
| 67-2 | 2 Pair Inputs, 2 Parallel Pair Outputs, Sealed Wire Terminal |