68M-2-2T

Dual-Line Sealed Wire Terminal with Two Stubs

Equipped with Integral Sealed Test Points

Utilizes Tii's Gel Sealed Tool-Less IDC Rocker Design

Mounts Easily to a Suitable Flat Surface


CAT-6 Compliant

Listed to UL 1863



Corporate Headquarters:

141 Rodeo Drive Edgewood, NY 11717 Phone: 631.789.5000 Fax: 631.789.5063 Toll Free: 888.844.4720 sales@tiitech.com

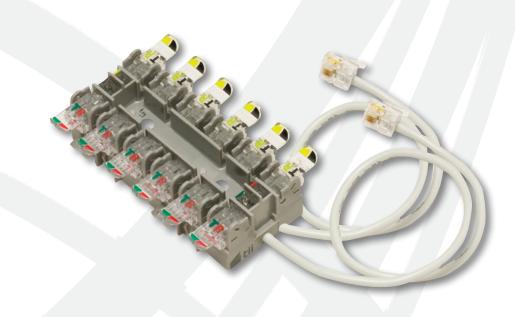


The 68M-2-2T Sealed Wire Terminal is designed for applications requiring more than one parallel connection (extension) to a dual pair service.

KEY PRODUCT BENEFITS

- Incorporates integral sealed test points no additional loose test clips required
- Accommodates multiple extension connections for two line digital voice (or POTS) signals
- ▶ Terminations are made to gel sealed insulation displacement contacts (IDC) by means of convenient tool-less rocker assemblies. Wire stripping is not required.
- Compact, low profile design fits into applications where space is limited
- The 68M-2-2T may be mounted via screws to a suitable flat surface
- Accepts 26 through 22 gauge solid conductor wire sizes

INDUSTRY STANDARDS

Meets UL 1863

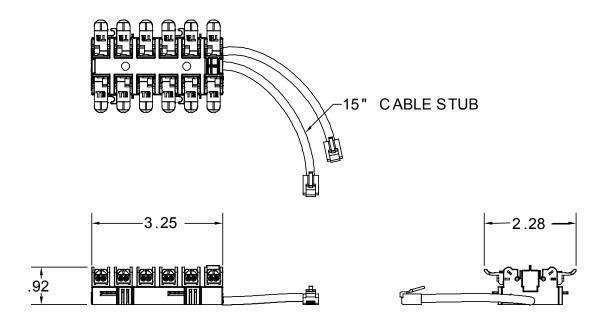

Dimensions are in Inches

ORDERING INFORMATION

Model No.	Description
68M-2-2T	2 Pair Input, 2 Individual 5 Parallel Pair Output, Sealed Wire Terminal with Integral Sealed Test Ports and 15"Two Stubs with RJ-11 Connectors