

69T-2S Series

Sealed Wire Terminal with Home Security Connections

For Indoor or Outdoor
Applications

Offers Multiple Extension
Connections for One or
Two VoIP (or POTS) Lines

Equipped with Integral
Sealed Test Points

Available in Multiple
Configurations

CAT-6 Compliant

Listed to UL 1863



Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717


Phone: 631.789.5000

Fax: 631.789.5063

Toll Free: 888.844.4720

sales@tiitech.com

www.tiitech.com

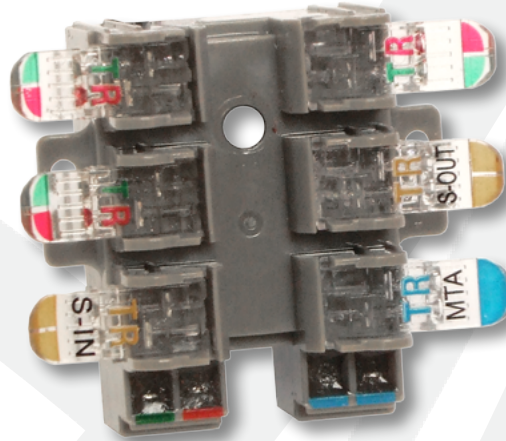

The 69T-2S Series is designed for applications requiring more than one parallel connection to a single or two pair service. This product is an ideal fit for Voice Over Internet Protocol (VoIP) networks.


KEY PRODUCT BENEFITS

- ▶ Incorporates integral sealed test points – no additional loose test clips required
- ▶ Accommodates multiple extension connections for one or two line VoIP (or POTS) signals
- ▶ Each enclosure has two wire entrance grommets and a snap-fit hinged cover with provisions for a tie wrap along with mounting holes for wall or pole mounting
- ▶ Terminations are made to gel-sealed insulation displacement contacts (IDC) by means of convenient tool-less rocker assemblies. Wire stripping is not required
- ▶ Compact, low profile design fits into applications where space is limited
- ▶ Accepts 26 through 22 gauge solid conductor wire sizes
- ▶ Provides inference connection points for security systems. Each connection is identified for proper wiring
- ▶ Main circuit consists of one pair input from the security output, and three parallel outputs
- ▶ Home security circuit consists of an incoming digital voice service output, and an output to security system input pair

INDUSTRY STANDARDS

- ▶ Listed to UL 1863

69T-2S Series

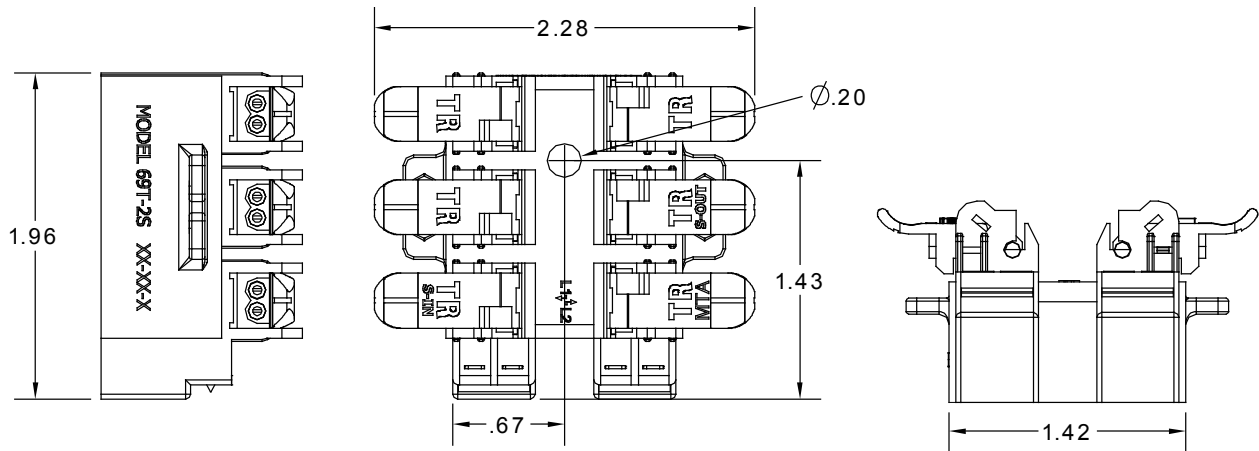

Dimensions are in Inches

ORDERING INFORMATION

| Model No. | Description |
|---------------|---|
| 69T-2S | Wire Terminal Consisting of Two Independent Sealed Wire Termination Circuits with Integral Sealed Test Points |