

## 763

### *Six-Line Indoor/Outdoor Network Interface Devices*

One to Six Line Capability  
Durability Proven Through  
Years of Field Experience

Offered With  
Optional Electronics

Includes Tii's Superior  
Performing Customer  
Bridge Module

Unsurpassed RJ-11  
Performance

Secure Customer Cover  
with Telco Override


Listed to UL 1863



**Tii Technologies Inc.**

**Corporate Headquarters:**

141 Rodeo Drive  
Edgewood, NY 11717  
Phone: 631.789.5000  
Fax: 631.789.5063  
Toll Free: 888.844.4720  
sales@tiitech.com

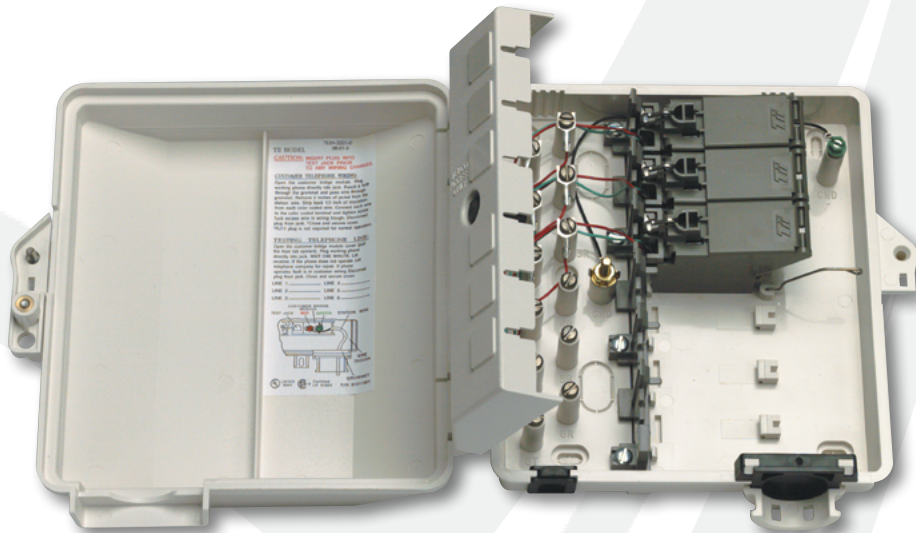


The 763 is a highly durable, environmentally protected Six-Line Indoor/Outdoor Network Interface unit that features optional built-in electronics to meet a wide range of applications.

#### **KEY PRODUCT BENEFITS**

- ▶ The 763 is molded of high-impact thermoplastic material to provide exceptional durability
- ▶ A side-opening, hinged main cover closes with a Customer locking/Telco bypass security feature
- ▶ A restricted access telephone company compartment and a customer network interface compartment are located under the main cover
- ▶ Superior performing Customer Bridge Module includes Tii's Auto-Jack® RJ-11 which is protected from the environment, requires no RJ-11 plug, and exceeds Telcordia requirements for first and second level power surges, resulting in unsurpassed performance
- ▶ Customer connections are equipped with insulated screw terminals or optional gel sealed IDC terminations
- ▶ Each lockable Customer Bridge Module can accept a standard RJ-11 plug for customer troubleshooting, and easily snaps into place
- ▶ For special customer ground situations (such as party line service, coin phone), a ground termination point is located in the upper most position of the customer compartment
- ▶ The 763 is available with or without a 6' cable stub

#### **INDUSTRY STANDARDS**

- ▶ Tii's Customer Bridge Module exceeds Telcordia "Severe Climatic" requirements for first and second level lightning surges, resulting in unsurpassed performance.
- ▶ Meets Telcordia TR-NWT-000239
- ▶ Listed to UL 1863

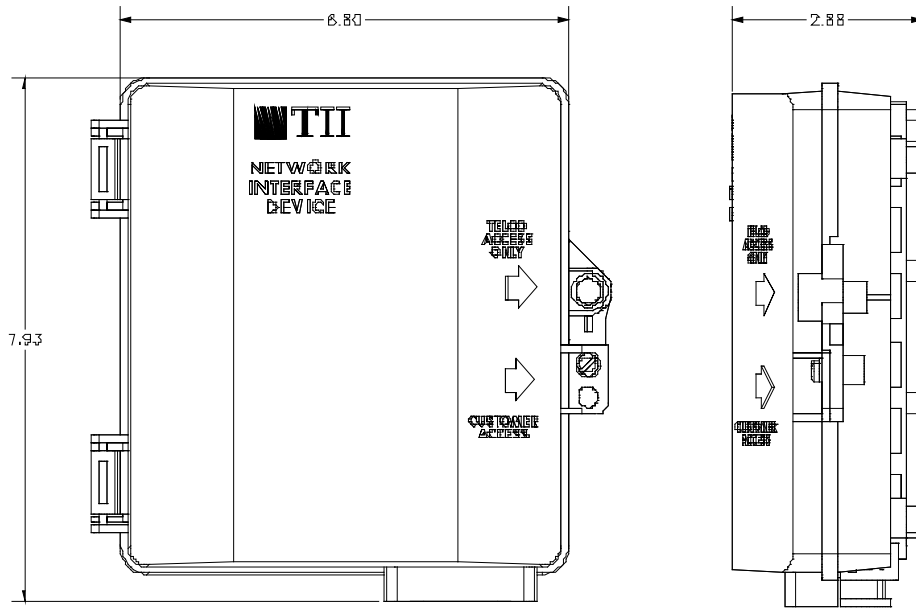

Dimensions are in Inches

**ORDERING INFORMATION**

763X	-X	-X	-XX	-X
	<b>Customer Bridge Module</b>			
<b>Security Screw</b>	<b>No. of CBMs</b>	<b>Wiring Type</b>	<b>Electronics</b>	<b>Stub</b>
H = Hex Head	0 = None	0 = None	00 = None	0 = None
P = Pin-In-Head	1 = One	S = Insulated Screws	01 = 1/2 Ringer	1 = With Stub
	2 = Two	I = IDC Terminations	09 = ADSL POTS Splitter	
	3 = Three		10 = DSL Compliant	
	4 = Four		1/2 Ringer	
	5 = Five		18 = Combination	
	6 = Six		1/2 Ringer & RFI Filter	

**Standard Pkg.** 20 pieces - 1.3 lbs. each (enclosure only)