

8925

25 Pair Indoor Network Interface Devices

Equipped with 25 Pair
Terminations and RJ-11
(Auto-Jack®) Test Jacks

Screw or IDC/Rocker
Customer Terminations

Offered with Optional
Half-Ringer Electronics

Self-Latching Hinged Cover
UL Listed to 1863



Tii Technologies Inc.


Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

www.tiitech.com



8925A
IDC Rocker Version

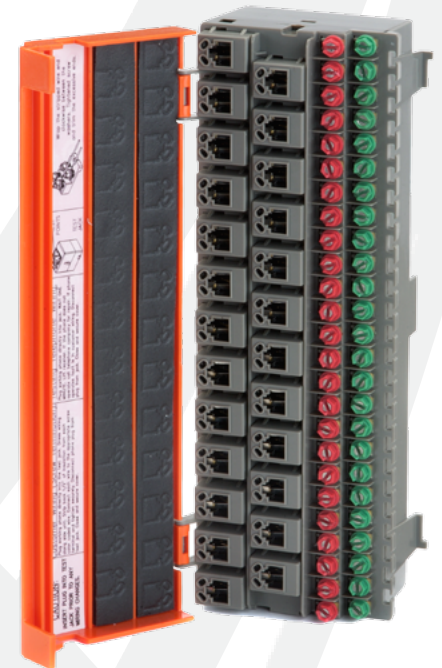

8925B
Screw Terminal Version


8925 Series Network Interface Devices (NIDs) are compact devices that specifically designed to be used in place of the "66" type block. The tii 8925 NIDs utilize the same footprint as the standard 66 block. They provide 25 RJ-11 snap-in type Auto-Jacks® for multi-line demarcation testing in one compact unit. The 8925 Series is available with standard screw terminations or Insulation Displacement Contacts (IDCs).

KEY PRODUCT BENEFITS

- ▶ Offered with screw terminations or convenient IDC/rocker terminations.
- ▶ Offered with or without half-ringer electronics.
- ▶ 8925's come equipped with a self-latching hinged cover for convenient telco access
- ▶ Telco terminations are made by means of a 50 pin RJ-21 connector
- ▶ The units can be mounted to a wall, frame or back-board with an optional tii 8B mounting bracket.
- ▶ Tii's patented RJ-11 Auto-Jack® meets Telcordia GR-49-CORE normal and severe lightning surge immunity requirements

INDUSTRY STANDARDS


- ▶ Listed To UL 1863

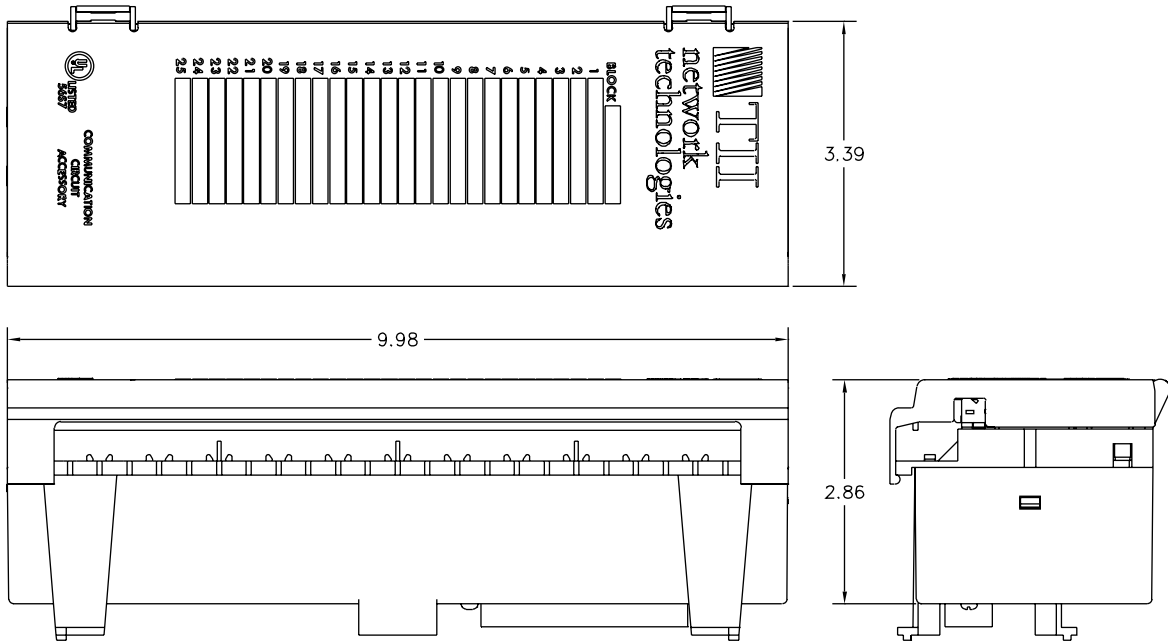

Dimensions are in Inches

ORDERING INFORMATION

Model No.	Description	Standard Pkg.
8925A	25 Pair Network Interface Device Equipped with IDC Terminations	
8925A-01	25 Pair Network Interface Device Equipped with IDC Terminations and 25 ½ Ringers	
8925A-B	25 Pair Network Interface Device Equipped with IDC Terminations, with Mounting Bracket	
8925A-01B	25 Pair Network Interface Device Equipped with IDC Terminations and 25 ½ Ringers, with Mounting Bracket	6 pieces 1.7 lbs. each (without 8B Mounting Bracket)
8925B	25 Pair Network Interface Device Equipped with Insulated Screws	
8925B-01	25 Pair Network Interface Device Equipped with Insulated Screws and 25 ½ Ringers	
8925B-B	25 Pair Network Interface Device Equipped with Insulated Screws, with Mounting Bracket	
8925B-01B	25 Pair Network Interface Device Equipped with Insulated Screws and 25 ½ Ringers, with Mounting Bracket	



Optional 8B Mounting Bracket for 8925