

## IF Series

### Indoor Fixed BET and BET/NID

Available in 25, 50 and  
100 Pair Counts

BET/NID Versions  
Utilize Tii Auto-Jack®

Toolless IDC Connections

CAT5e Transmission  
Performance

Compact Footprint

Steel Construction

Padlockable



**Tii Technologies Inc.**

**Corporate Headquarters:**

141 Rodeo Drive  
Edgewood, NY 11717

Phone: 631.789.5000

Fax: 631.789.5063

Toll Free: 888.844.4720


sales@tiitech.com

[www.tiitech.com](http://www.tiitech.com)


25 Pair IDC



25 Pair RJ21

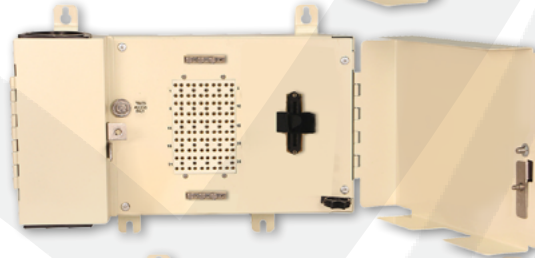

25 Pair IDC/NID

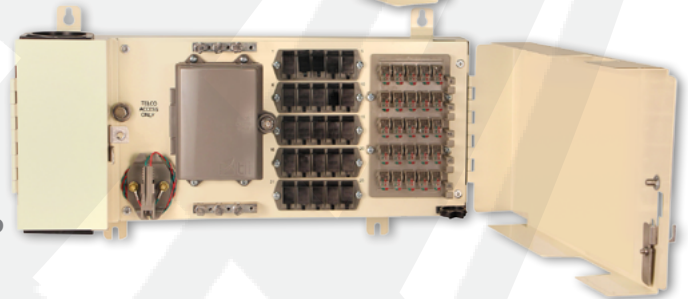

Tii's IF Series Fixed Indoor BETs and BET/NIDs serve as network demarcation and distribution points to protect and distribute central office cable pairs at the subscribers' premises.

BET/NIDs utilize the Tii Auto-Jack® to accomplish demarcation point testing. When engaged, the Auto-Jack® connects the RJ11 test plug contacts to the Central Office (CO) for dial tone validation, while disconnecting the customer from the circuit.

A wide variety of splice modules are available for central office cable. Units are available with or without factory installed & tested solid state or gas tube protectors.



#### KEY PRODUCT BENEFITS

- ▶ Steel construction, powder coated beige
- ▶ Outer cover requires 216 tool for access
- ▶ Padlockable with Telco override
- ▶ Splice chamber requires 216 tool for access
- ▶ Industry standard 5-pin protector field
- ▶ 1:1 Cross Connect versions available
- ▶ Available with factory installed solid state or gas tube protectors
- ▶ Stackable for additional capacity using a stacking kit




#### INDUSTRY STANDARDS

- ▶ IDC Connector - Telcordia TR-NWT-001195
- ▶ BET - Telcordia GR-937/GR-2916
- ▶ NID - Telcordia GR-49/GR-239
- ▶ UL Listed


# IF Series BETs

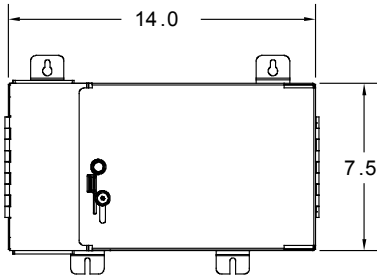

**BET**

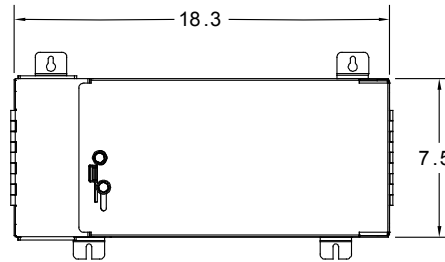

**BET/NID**



(25 pair shown)

Dimensions are in Inches

	Pair Count	Dimensions (height x width x depth)
<b>BET</b>	25 Pair	8.00" x 14.00" x 4.20"
	50 Pair	14.00" x 14.00" x 4.20"
	100 Pair	14.00" x 19.50" x 4.20"
<b>BET/NID</b>	25 Pair	8.00" x 19.00" x 4.20"
	50 Pair	14.00" x 19.00" x 4.20"
	100 Pair	27.50" x 19.00" x 4.20"
<b>BET with RJ21 only</b>	25 Pair	8.00" x 14.00" x 4.20"
	50 Pair	14.00" x 14.00" x 4.20"
	100 Pair	14.00" x 19.50" x 4.20"

## ORDERING INFORMATION

IF	XXX	X	F	XXX	X	XXX	XX	X
Pair Count	Output	Housing	Protection	Input	Cable Length	OEM	Cover	
025	N = None	F = Fixed	NOP = No Protectors	G = Stub Cable	007 = 7 Ft.	Contact	C = Cover	
050	C = 66 Block		3B1ES = 300V Solid State Black, no Test Points	H = 4005 GPM (MS2 Gel)	025 = 25 Ft.	Sales	Blank = No Cover	
100	M = Toolless IDC & NID		3B1FS = 240V Solid State Black, no Test Points	J = 4005 DPM/FR	050 = 50 Ft.			
	P = Toolless IDC		3B3ES = 300V Solid State Red, no Test Points	(MS2 Fire Retardant)	100 = 100 Ft.			
	R = Toolless IDC & RJ21		3B3FS = 240V Solid State Red, no Test Points	K = 4005 DBM (MS2 Dry)				
	S = RJ21		3C1ES = 300V Solid State Black, Test Points	P = 710 SC1 (710 Gel)				
	T = Toolless IDC & 1:1 Cross Connect		3C1FS = 240V Solid State Black, Test Points	T = 710 SD1 (710 Dry)				
			3C3ES = 300V Solid State Red, Test Points	N = Raw Cable				
			3C3FS = 240V Solid State Red, Test Points					
			6B1E = 350V Gas Tube, Black, PTC, no Test Points					
			6C1E = 350V Gas Tube, Black, PTC, no Test Points					
			3B1E = 350V Gas Tube, Black, no no Test Points					
			3C1E = 350V Gas Tube, Black, Test Points					