

IM Series

25-100 Pair Indoor Modular BET, BET/NID

Available in 25, 50
and 100 Pair Counts

BET/NID Versions
Utilize Tii Auto-Jack®

Toolless IDC Connections

CAT5e Transmission Performance

Compact Footprint

Steel Construction

Padlockable



Tii Technologies Inc.

Corporate Headquarters:


141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000 • Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

Locations:


South March
Long March Industrial Estate
Daventry, Northamptonshire, NN11 4PH, UK
Phone: +44 (0) 1327 301853
Fax: +44 (0) 1327 879532
sales@tiitech.co.uk

Av. José de Escandón y Helguera
No. 21 Ciudad Industrial
Matamoros, Tamaulipas, C.P. 87494, México
Phone: 868.812.8011 • Fax: 868.812.8025
salesmx@tiitech.com.mx

www.tiitech.com

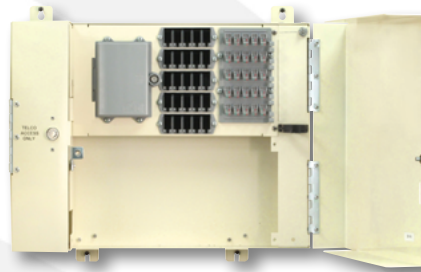

25-50 PAIR
HOUSING

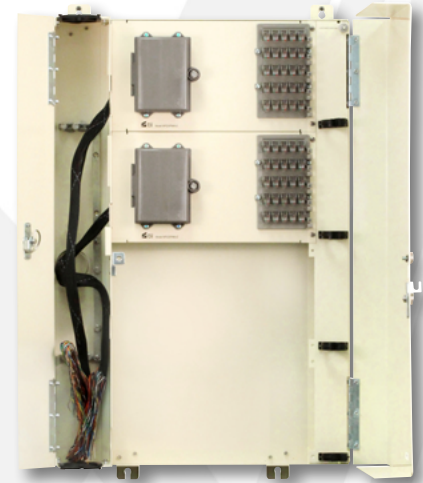

25-100 PAIR
HOUSING

Tii's IM Series Modular Indoor BET and BET/NIDs serve as a network demarcation and distribution point to protect and distribute central office cable pairs at the subscribers' premises. The modular designs allow maximum flexibility and easy expansion.

The customer demarcation point in BET/NIDs is implemented using the Tii Auto-Jack®. When engaged, the Auto-Jack® connects the RJ11 test plug contacts to the Central Office (CO) for dial tone validation, while disconnecting the customer from the circuit.

A wide variety of splice modules are available for central office cable. The protection field can be populated with solid state or gas tube protectors, and is sealed to protect from moisture and corrosion. The units are available with or without factory installed & tested solid state or gas tube protectors.




KEY PRODUCT BENEFITS

- ▶ Steel construction, powder coated beige
- ▶ Padlockable with Telco override
- ▶ Splice chamber requires 216 tool for access
- ▶ Industry standard 5-pin protector field
- ▶ Assortment of splice modules for central office cable
- ▶ Available with factory installed solid state or gas tube protectors
- ▶ Stackable for additional capacity using a stacking kit



INDUSTRY STANDARDS

- ▶ IDC Connector - Telcordia TR-NWT-001195
- ▶ BET - Telcordia GR-937/GR-2916
- ▶ NID - Telcordia GR-49/GR-239
- ▶ UL Listed

IM Series BETs



B = 25-50 PAIR

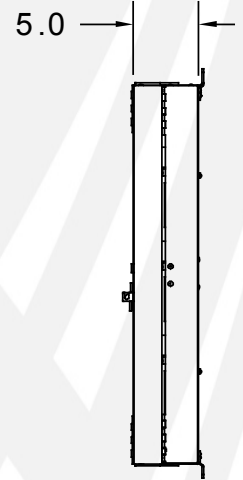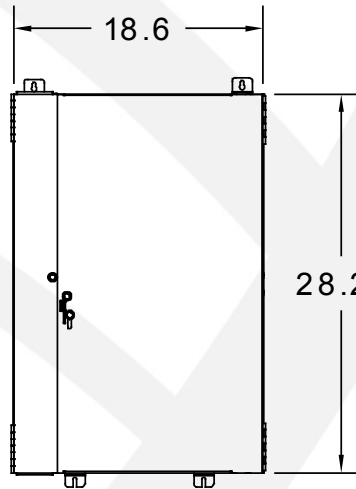

C = 25-100 PAIR

Dimensions are in Inches

Housing	Dimensions (height x width x depth)
25-50 Pair	14.2" x 18.6" x 5.0"
25-100 Pair	28.2" x 18.6" x 5.0"

ORDERING INFORMATION

IM	XXX	X	X	XXX	X	XXX	XX
Pair Count	Output	Housing	Protection	Input	Stub Length	OEM	
025	N = None	B = 25-50 Pair	NOP = No Protectors	G = Stubbed Only	000 = None	Contact Sales	
050	M = Toolless IDC & NID	C = 25-100 Pair	3B1ES = 300V Solid State Black, no Test Points	H = 4005 GPM (MS2 Gel)	007 = 7 Ft		
100	P = Toolless IDC		3B1FS = 240V Solid State Black, no Test Points	K = 4005 DBM (MS2 Dry)	025 = 25 Ft		
	R = Toolless IDC & RJ21		3B3ES = 300V Solid State Red, no Test Points	P = 710 SC1 (710 Gel)			
	S = RJ21		3B3FS = 240V Solid State Red, no Test Points	T = 710 SD1 (710 Dry)			
			3C1ES = 300V Solid State Black, Test Points	N = Raw Cable			
			3C1FS = 240V Solid State Black, Test Points				
			3C3ES = 300V Solid State Red, Test Points				
			3C3FS = 240V Solid State Red, Test Points				
			6B1E = 350V Gas Tube, Black, PTC, no Test Points				
			6C1E = 350V Gas Tube, Black, PTC, Test Points				
			3B1E = 350V Gas Tube, Black, no Test Points				
			3C1E = 350V Gas Tube, Black, Test Points				