

## P310

### 100 Pair Wire-Wrap Connector Block

Accepts Industry Standard  
5-Pin Protector Modules

Compact,  
Lightweight Design

Telcordia TA-EOP-000164  
Compliant



The P310 protects personnel and expensive equipment from damaging electrical surges that may get onto incoming cable lines. Compact design with straight or angled mounting option.

Arranged in Two 5x10 arrays that utilize industry standard 5-pin protector modules.

#### KEY PRODUCT BENEFITS

- ▶ 100-pair front facing test field
- ▶ Compact, lightweight design saves space and increases number of protected pair per frame
- ▶ Accepts industry standard 5-pin protector modules
- ▶ Gold plated protector module sockets and test field contacts for superior electrical contact that eliminate noise problems
- ▶ Fanning strips allow easy wire management for both field stubbing and cross connection to horizontal blocks bracket
- ▶ Front ground test point offers labor savings and reliability
- ▶ Custom connectorization available

#### INDUSTRY STANDARDS

- ▶ Telcordia TA-EOP-000164 Compliant




**Tii Technologies Inc.**

**Corporate Headquarters:**  
141 Rodeo Drive  
Edgewood, NY 11717  
Phone: 631.789.5000  
Fax: 631.789.5063  
Toll Free: 888.844.4720  
sales@tiitech.com

[www.tiitech.com](http://www.tiitech.com)

**Porta**  
systems products

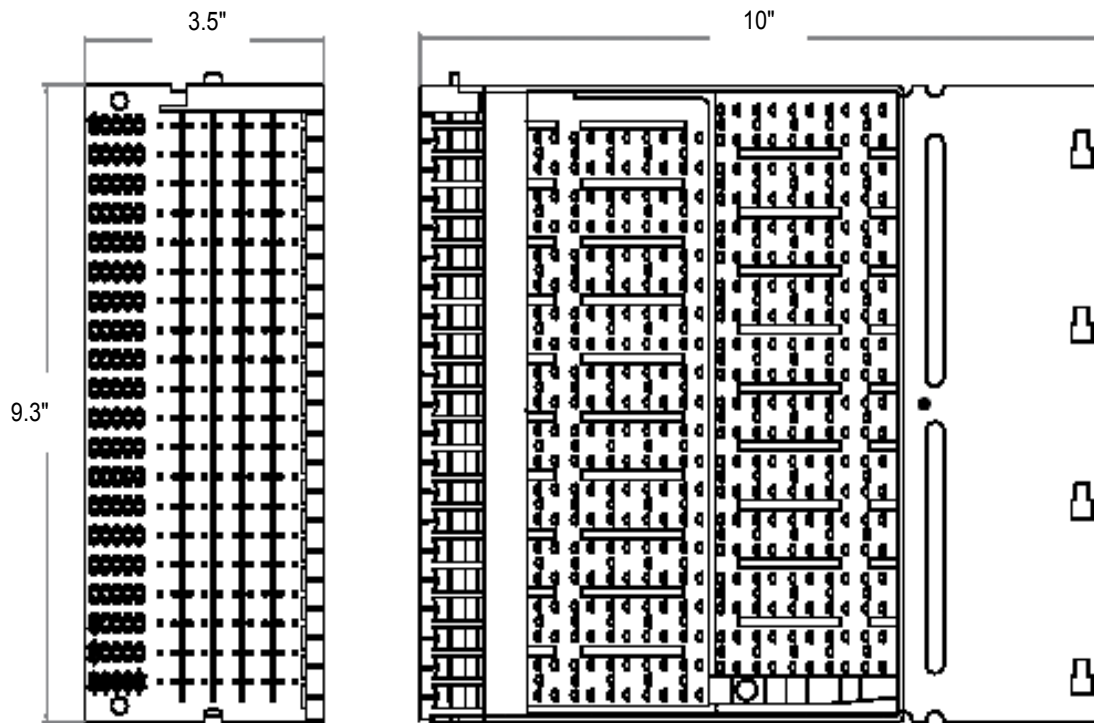

Dimensions are in Inches

## SPECIFICATIONS

|  |  |
|--|--|
| <b>Operating Temperature</b>               | -13°F to 149°F (-25°C to 65°C)                 |
| <b>Dimensions (height x width x depth)</b> | 9.3" x 3.5" x 10" (23.7 cm x 8.9 cm x 25.4 cm) |

Meets or exceeds specifications Listed to UL 497 and those set forth in Telcordia GR-2916 and Telcordia TA-EOP-000164

## ORDERING INFORMATION

| Model No.                     | Pair Count | Description  |
|-------------------------------|------------|--|
| <b>P310-WW-[24 or 22]-nn*</b> | 100        | Wire-Wrap Terminations and Factory Stubbed         |
| <b>P310-WW-[**]</b>           | 100        | Wire-Wrap Terminations and Custom Connectorization |

\* Factory Stubbed Blocks add "24 or 22" to indicated cable AWG, "-" and length (nn) of cable required in feet. (For Example: P310-WW-24-50)

\*\* Custom cable length and connectors (RJ21, 710, MS2)