


Fiber Optic Pigtails

SIMPLEX 900UM PIGTAILS

	SINGLEMODE	MM62.5 OM-1	MM50 OM-2	MM50 OM-3
FC	R1S9-FC1M	LC K1S9-LC1M	LC C1S9-LC1M	LC S1S9-LC1M
FC APC	R1S9-FA1M	SC K1S9-SC1M	SC C1S9-SC1M	SC S1S9-SC1M
LC	R1S9-LC1M	ST K1S9-ST1M	ST C1S9-ST1M	ST S1S9-ST1M
SC	R1S9-SC1M	• Tight Buffer 900um		
SC APC	R1S9-SA1M	• Standard length 1 meter		
ST	R1S9-ST1M	• Individually bagged and labeled		



6 FIBER 900UM PIGTAILS

	SINGLEMODE	MM62.5 OM-1	MM50 OM-2	MM50 OM-3
FC	R6D9-FC2M	LC K6D9-LC2M	LC C6D9-LC2M	LC S6D9-LC2M
FC APC	R6D9-FA2M	SC K6D9-SC2M	SC C6D9-SC2M	SC S6D9-SC2M
LC	R6D9-LC2M	ST K6D9-ST2M	ST C6D9-ST2M	ST S6D9-ST2M
SC	R6D9-SC2M	• Fiber Tight Buffer 900um		
SC APC	R6D9-SA2M	• Standard length 2 meters		
ST	R6D9-ST2M	• Clear molded packaging		



12 FIBER 900UM PIGTAILS


	SINGLEMODE	MM62.5 OM-1	MM50 OM-2	MM50 OM-3
FC	RBD9-FC3M	LC KBD9-LC3M	LC CBD9-LC3M	LC SBD9-LC3M
FC APC	RBD9-FA3M	SC KBD9-SC3M	SC CBD9-SC3M	SC SBD9-SC3M
LC	RBD9-LC3M	ST KBD9-ST3M	ST CBD9-ST3M	ST SBD9-ST3M
SC	RBD9-SC3M	• 12-Fiber Tight Buffer 900um		
SC APC	RBD9-SA3M	• Standard length 3 meters		
ST	RBD9-ST3M	• Clear molded packaging		



Tii Technologies Inc.


Corporate Headquarters:
141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

Pigtails

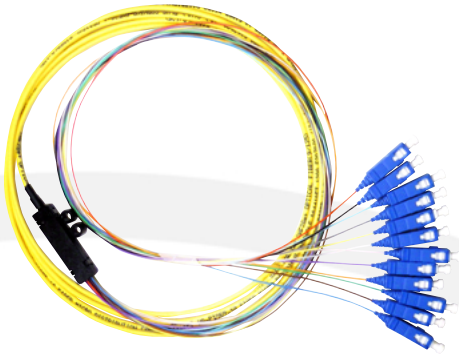

12 FIBER 250UM PIGTAILS

	SINGLEMODE		MM62.5 OM-1		MM50 OM-2		MM50 OM-3
FC	RBD5-FC3M	LC	KBD5-LC3M	LC	CBD5-LC3M	LC	SBD5-LC3M
FC APC	RBD5-FA3M	SC	KBD5-SC3M	SC	CBD5-SC3M	SC	SBD5-SC3M
LC	RBD5-LC3M	ST	KBD5-ST3M	ST	CBD5-ST3M	ST	SBD5-ST3M
SC	RBD5-SC3M	• 12-Fiber micro-distribution 250um					
SC APC	RBD5-SA3M	• Standard length 3 meters					
ST	RBD5-ST3M	• Clear molded packaging					

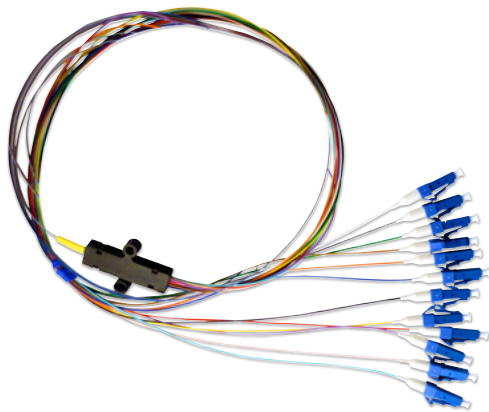

12 FIBER RIBBON PIGTAILS

	SINGLEMODE		MM62.5 OM-1		MM50 OM-2		MM50 OM-3
FC	RBRB-FC3M	LC	KBRB-LC3M	LC	CBRB-LC3M	LC	SBRB-LC3M
FC APC	RBRB-FA3M	SC	KBRB-SC3M	SC	CBRB-SC3M	SC	SBRB-SC3M
LC	RBRB-LC3M	ST	KBRB-ST3M	ST	CBRB-ST3M	ST	SBRB-ST3M
SC	RBRB-SC3M	• 12-Fiber Ribbon Fanout					
SC APC	RBRB-SA3M	• Color coded 900um Fanout kit 25" legs					
ST	RBRB-ST3M	• Standard length 3 meters					
		• Clear molded packaging					

FIBER SELECTION SPECIFICATIONS

The first digit in the model number identifies the type of fiber

Fiber Code	Standard	Description
R	G.657A1	Singlemode BIF 10mm
N	G.657A2	Singlemode BIF 7.5mm
Z	G.657B3	Singlemode BIF 5mm
K	OM-1	Multimode 62.5
C	OM-2	Multimode 50
S	OM-3	Multimode 50 LOMF 300m
T	OM-4	Multimode 50 LOMF 550m