

SVMWT

Switchable Voice Module

For Use When Porting
Existing Telephone Numbers


Eliminates Need for
Additional Truck Rolls

Automatic Switching to
Digital Phone Service

No Attenuation to
Telephone Signals

Provides Secondary Telephone
Line Surge Protection, Enhancing
Digital Phone Service Reliability

Mounts Easily to a Suitable
Flat Surface or Installs in a
Tii Wire Terminal Housing

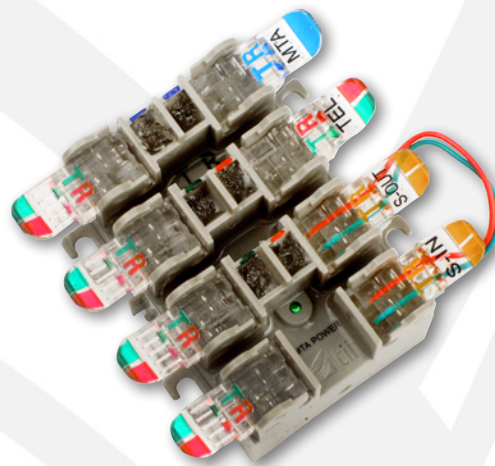

The Tii Switchable Voice Module (SVMWT) provides seamless switching from Telco service to digital phone service. Available as a single switch module (with reset button) or a two-way switching module, the SVMWT provides a flexible design solution to meet individual customer needs. The SVMWT utilizes gel-sealed insulation displacement terminations that provide reliable all weather connectivity. A flashing green LED indicates EMTA power is connected to the SVM.

KEY PRODUCT BENEFITS

- ▶ The customer is not without telephone service during number portability process
- ▶ Eliminates additional truck roll costs by automatically switching service provider connections when ring signals are detected from the MTA
- ▶ Telephone ringing voltage appearing on any of the service provider lines will cause the two way switch to convert to the alternate service provider, whereas the single switch module will switch to the MTA side on appearance of ringing voltage from the MTA
- ▶ A reset feature allows the single switch SVMWT to be restored to its original configuration
- ▶ Allows faster revenue capture by immediately switching from the incumbent service provider when a ported number is available
- ▶ Compact, low profile design fits into applications where space is limited
- ▶ The SVMWT Series may be universally mounted via screws to a suitable flat surface or installed within an indoor/outdoor Tii Switchable Voice NID (SVN) or 170 Series enclosure
- ▶ Accepts 26 through 22 gauge solid conductor wire sizes
- ▶ Flashing green LED indicates EMTA power

INDUSTRY STANDARDS

- ▶ Listed to UL 1863
- ▶ FCC Part 68 Registered
- ▶ Listed to cUL



Tii Technologies Inc.

Corporate Headquarters:


141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000 • Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

Locations:

South March
Long March Industrial Estate
Daventry, Northamptonshire, NN11 4PH, UK
Phone: +44 (0) 1327 301853
Fax: +44 (0) 1327 879532
sales@tiitech.co.uk

Av. José de Escandón y Helguera
No. 21 Ciudad Industrial
Matamoros, Tamaulipas, C.P. 87494, México
Phone: 868.812.8011 • Fax: 868.812.8025
salesmx@tiitech.com.mx

SVMWT

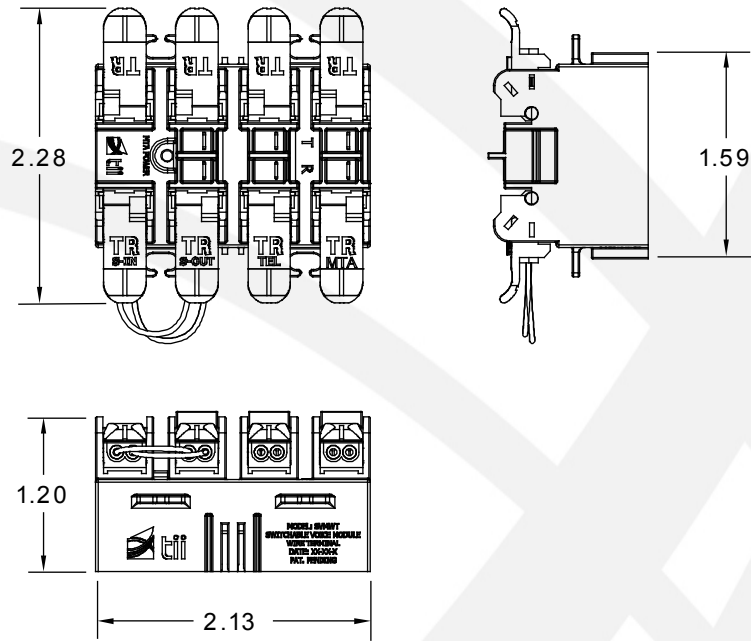

Dimensions are in Inches

ORDERING INFORMATION

Model No.

Description

SVMWT

2 Pair Input, 4 Parallel Output with Security Connection and Reset Button