




Fiber Entrance Terminal Series (FET)

FET1G Series




FET2G Series

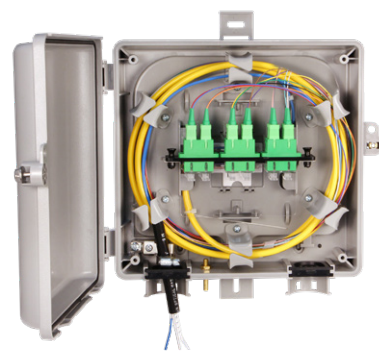

FET3G Series




FET4G Series

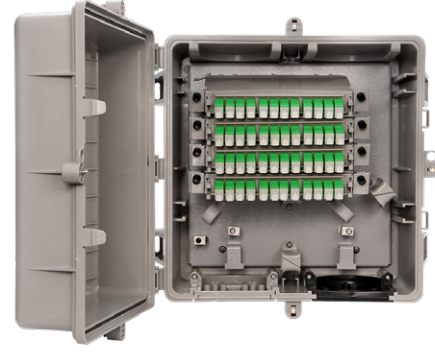

FET4H Series



FET4S Series

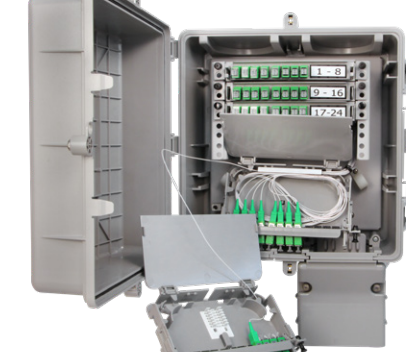

SHF/FET Series Preterminated Stub Housings



Adapter Type

SC or LC (UPC/APC)

SC or LC (UPC/APC)

SC or LC (UPC/APC)

SC or LC (UPC/APC)

SC or LC (APC/UPC)

SC or LC (APC/UPC)

SC or LC (UPC/APC)

Port Count

1 or 2 Single Cables

6, 8, 12, 16

4, 8, 12, 16, 24 (36, LC)

12, 24, 36, 48

8, 12, 16, 24, 32, 48

8, 16, 24, 32

Port Count is per FET unit

Mounting

Indoor/Outdoor Wall

Indoor/Outdoor Wall or Pole

Indoor/Outdoor Wall or Pole

Indoor/Outdoor Wall or Pole

Indoor/Outdoor Wall or Pole

Indoor/Outdoor Wall or Pole

Indoor/Outdoor Wall or Pole

Dimensions
(H x W x D)

5.45" x 4.33" x 2.57"

8.48" x 9.94" x 2.50"

13.24" x 9.24" x 4.73"

11.50" x 11.20" x 7.15"

11.50" x 11.20" x 7.15"

11.50" x 11.20" x 7.15"

Dimensions per FET unit

Markets

FTTx, MDU, PON,
CPE/Premise Wiring,
DOT, Wireless

FTTx, MDU, PON,
CPE/Premise Wiring,
DOT, Wireless

FTTx, MDU, PON,
CPE/Premise Wiring,
DOT, Wireless

FTTx, MDU, PON,
CPE/Premise Wiring,
DOT, Wireless

FTTx, MDU, PON, DOT

FTTx, MDU, PON, DOT

FTTx, MDU, PON,
CPE/Premise Wiring,
DOT, Wireless

Applications

A compact, patch and splice enclosure designed to provide a demarcation and transition point between fiber drop cable and the customer premise fiber cable

A compact enclosure designed to provide a demarcation and transition point between fiber drops and downstream devices. Its optional copper connectivity makes it an ideal device for interfacing to the Customer Premise, Small Cells, DAS, or G.fast modem devices

A compact fiber demarcation unit which features connectivity between the OSP fiber drops and customer fiber drops, allows for multiple splice and slack storage

A compact fiber demarcation unit which features connectivity between the OSP fiber drops and customer fiber drops, allows for multiple splice and slack storage

High density modular cassette base unit is Ideal for MDU / PON / Mini FDU solution for up to 48 customer service drops. Its flexible design and options support a wide range of deployment styles including fusion splicing, field termination, and backwards compatible to multiple suppliers PLC or LPS splitter modules.

High density modular cassette base unit is Ideal for MDU / PON solution for up to 32 customer service drops. Its flexible design and options support a wide range of deployment styles including fusion splicing, field termination, and backwards compatible to multiple suppliers PLC or LPS splitter modules.

Stubbed FET units are available with pre-terminated cables. Stubbed enclosures enable fast termination to other hardware in or outside of buildings, by just pulling off the reel

Features

Compact, low profile design for applications where space is limited, external ground included, available with pigtails

Compact low profile design; available with external ground, pigtails and PLC splitters

Compact weatherproof design available with external ground, pigtails, splicing capabilities and PLC splitters

Compact weatherproof design available with external ground, pigtails, splicing capabilities and PLC splitters

Compact weatherproof design Available with external ground, pigtails, splicing capabilities, custom stub lengths and PLC splitters

Compact weatherproof design Available with external ground, pigtails, splicing capabilities, custom stub lengths and PLC splitters

Factory terminated cable stub, Compact superior materials capable of withstanding harsh outdoor environments, including UV degradation, chemical exposure and extreme temperature

Splice Capability

2 splice provisions when used w/ Tii FP01 adapter plate

Patch or splice, single or mass fusion

Patch or splice, single or mass fusion

Patch or splice in cassettes - single fusion or MPO input cassettes

LPS Mini Splitter Module

PLC9 Splitter

—

Slack Storage

Yes

Yes

Yes

Yes

Yes

Yes

—

Lockable

Yes

Yes

Yes

Yes

Yes

Yes

Yes

Splitters

No

1x4, 1x8, 1x16

1x4, 1x8, 1x16

1x4, 1x8, 1x16, 1x32

1x4, 1x8, 1x16, 1x32

1x4, 1x8, 1x16, 1x32

No

Industry Standards

Listed to cUL 1863
Meets GR-771 Requirements & GR-1361-CORE Severe Environmental Conditions (-40° – 80°)

Meets NEMA-4, GR-771 Requirements & GR-1361-CORE Severe Environmental Conditions (-40° – 80°)

Meets NEMA-4, GR-771, GR-2898 Requirements & GR-1361-CORE Severe Environmental Conditions (-40° – 80°)

Designed to NEMA-4 and GR-2898 Requirements Meets GR-1361-CORE Severe Environmental Conditions (-40° – 80°)

Designed to NEMA-4 and GR-2898 Requirements Meets GR-1361-CORE Severe Environmental Conditions (-40° – 80°)

Designed to NEMA-4 and GR-2898 Requirements Meets GR-1361-CORE Severe Environmental Conditions (-40° – 80°)

Meets GR-771 Requirements & GR-1361-CORE Severe Environmental Conditions (-40° – 80°)