


Warranty: If this unit fails during the warranty period, contact Tii Customer Service to authorize return. Unit may be returned prepaid.



141 Rodeo Drive
Edgewood, NY 11717
Toll Free 888.844.4720
www.tiitech.com

Model CCP5
Customer Connection Point


Installation Note

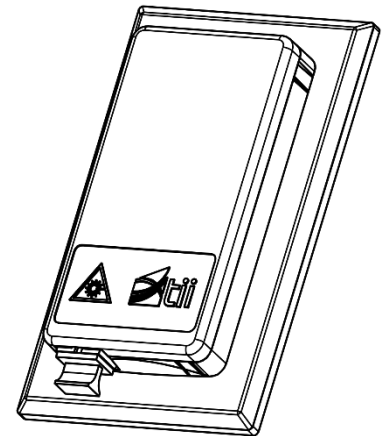

Description

1. The CCP5 Customer Connection Point Fiber Connectivity Enclosure is a compact, low profile unit intended for connection, demarcation and slack storage of fiber within a customer premise.
2. The CCP5 can be mounted directly to a wall baseboard or to a standard wall gang box by means of a wallplate.
3. The CCP5 contains an SC adapter and wire management features for slack storage.

Features

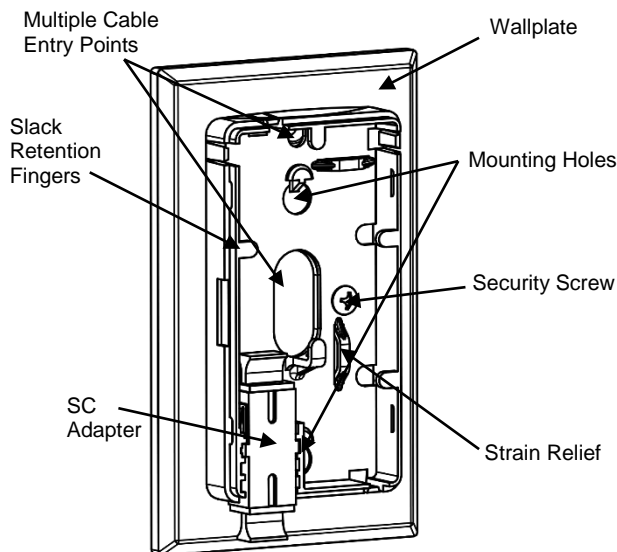

Installation

To install the CCP5 onto an electrical gang box:

1. Install wallplate to gang box using hardware provided.
2. Hang CCP5 onto wallplate by sliding base over hanging clips. Secure in position with supplied security screw.

To install directly to wall or baseboard:

1. Mount CCP5 base to wall or baseboard using hardware or double-sided tape provided.

To install fiber:

1. Route fiber through cable entry hole in base plate.
2. Coil excess fiber using slack retention fingers.
3. Tie-wrap slack to strain relief provisions.
4. Insert SC connector into SC adapter provided.
5. Snap cover securely onto base.
6. Connect equipment to SC adapter port.

