

## 162T Series

### Outdoor Sealed Wire Terminal Enclosures

For Indoor or  
Outdoor Applications

---

Ideal for VoIP Applications

---

Offers Multiple Extension  
connections for One or  
Two VoIP (or POTS) Lines

---

Equipped with Integral  
Sealed Test Points

---

Utilizes Gel-Sealed IDC  
Tool-Less Rocker Design

---

CAT-6 Compliant

---

Listed to UL 1863



**Tii Technologies Inc.**

**Corporate Headquarters:**  
141 Rodeo Drive  
Edgewood, NY 11717  
Phone: 631.789.5000  
Fax: 631.789.5063  
Toll Free: 888.844.4720  
sales@tiitech.com



162T-2

162T Series Outdoor Sealed Wire Terminal Enclosures accommodate 69T Series Sealed Wire Terminals. The 69T Series is designed for applications requiring more than one parallel connection to a single or two pair service. This product is an ideal fit for Voice Over Internet Protocol (VoIP) networks.


#### KEY PRODUCT BENEFITS

- ▶ The enclosure is molded of temperature and humidity-resistant thermoplastic, which resists cracking, crazing, and discoloration
- ▶ The cover interlocks with the base to protect the contents from any foreign matter
- ▶ Each enclosure has two wire entrance grommets and a snap-fit hinged cover with provisions for a tie wrap along with mounting holes for wall or pole mounting
- ▶ Terminations are made to gel-sealed insulation displacement contacts (IDC) by means of convenient tool-less rocker assemblies. Wire stripping is not required
- ▶ Compact, low profile design fits into applications where space is limited
- ▶ Accepts 26 through 22 gauge solid conductor wire sizes
- ▶ Convenient integral sealed test points – no additional loose test clips required
- ▶ The 162T-2S provides interface connection points for security systems and each connection is identified for proper wiring

#### INDUSTRY STANDARDS

- ▶ Listed to UL 1863

# 162T Series

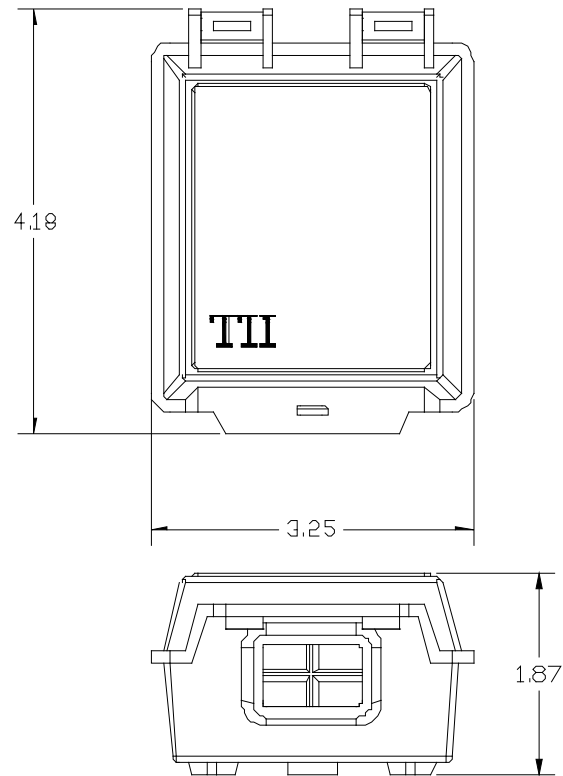

*Dimensions are in Inches*

## ORDERING INFORMATION

Model No.	Description	Standard Pkg.
<b>162-0</b>	Empty Housing with Mounting Post	
<b>162T-1</b>	Wire Terminal Housing Equipped with 1 69T-1, 1 Pair Input, 5 Parallel Pair Outputs Sealed Wire Terminal with Integral Sealed Test Points	50 pieces - 0.55 lbs. each
<b>162T-2</b>	Wire Terminal Housing Equipped with 1 69T-2, 2 Pair Inputs, 4 Parallel Pair Outputs Sealed Wire Terminal with Integral Sealed Test Points	
<b>162T-2S</b>	Wire Terminal Housing Equipped with One 69T-2S for Security System Wiring	